

**Anwendung:** Allgemeiner Maschinen-und Anlagenbau, Modellbau, Fördertechnik, Werkzeugmaschinen, Landmaschinen, Sägeindustrie, Lagerlogistik, usw..

**Technische Dsten:**

Material: Legierter Stahl

Modellnummer: 0056004

Zugfestigkeit: 18 kN

Typ: Rollenkette

Standard oder nicht Standard: Standard


Serie: 08B

Knoten: 120

Länge: 1524mm /60inch

Teilung (p mm): 12.7mm, 1/2inch

Gewicht: 1,05 kg

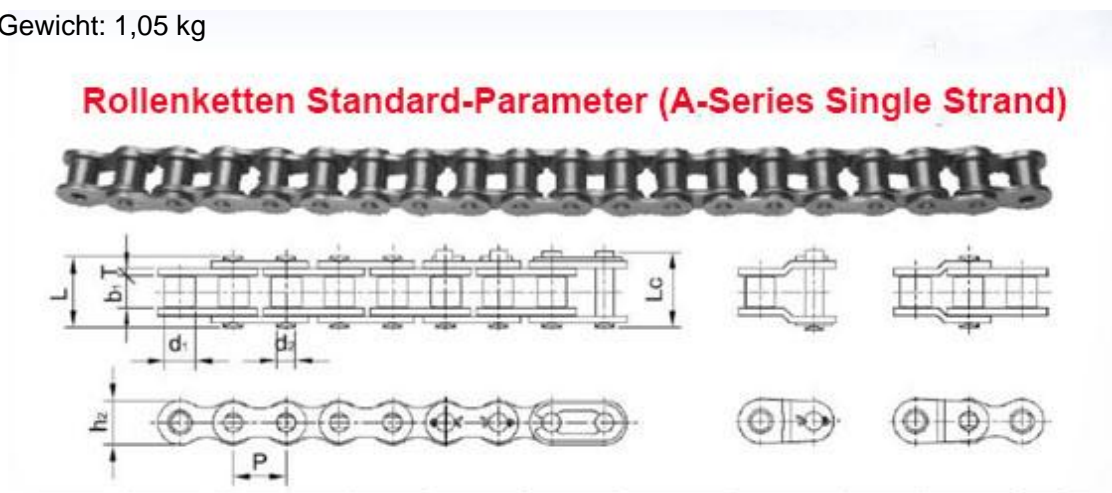

ISO/ DIN 链号 ISO/ DIN Chain NO.	ANSI 链号 ANSI Chain NO.	节距 Pitch		滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate Tensile strength	每米重量 Weight per meter
		P		d1 max	b1 min	d2 max	L min	Lc max	h2 max	T	Q(ISO/ DIN) min	q≈
		mm	inch	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
*03C-1	*15	4.7625	3/16"	2.48	2.38	1.62	6.10	6.90	4.30	0.60	1.80	0.08
*04C-1	*25	6.35	1/4"	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50	0.15
*06C-1	*35	9.525	3/8"	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90	0.33
085-1	41	12.70	1/2"	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67	0.41
08A-1	40	12.70	1/2"	7.95	7.85	3.96	16.6	17.8	12.00	1.5	14.10	0.62
10A-1	50	15.875	5/8"	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20	1.02
12A-1	60	19.050	3/4"	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80	1.50
16A-1	80	25.40	1"	15.88	15.75	7.92	32.7	35.00	24.00	3.25	56.70	2.60
20A-1	100	31.75	5/4"	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50	3.91
24A-1	120	38.100	3/2"	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00	5.62
28A-1	140	44.450	7/4"	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40	7.50
32A-1	160	50.800	2"	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80	10.10
36A-1	180	57.150	9/4"	35.71	35.48	17.46	72.80	78.60	53.60	7.20	280.20	13.45
40A-1	200	63.500	5/2"	39.68	37.85	19.85	80.30	87.20	60.00	8.00	353.80	16.15
48A-1	240	76.20	3"	47.63	47.35	23.81	95.50	103.0	72.39	9.50	510.30	23.20

Die Kette ist ein Zyklus, kann trennen und verbinden. Die Infos über die Verbindungsglieder ist wie folgende:

Steel Sprockets and Chain Specification List										
			Standard Processing (Without tighten screws)			Fine Processing (With tighten screws)				
节距 Pitch	型号 Model	齿数 Gear Number	外形尺寸 Dimension (mm)						Net Weight (Kg)	备注 Remark
			齿宽 Gear Width H	总厚 Overall Width L	凸台 Plate Dia. D	内孔 Bore Dia. C	分度圆 P Circle Dia. A			
for <b>04C</b> Chain Pitch=6.35mm=1/4"  	04C-10F	10	2.8	16	16	6	7.8	20.5	0.03	Fine Processing (with tighten screws)
	04C-15F	15			23	6	8	30.5	0.05	
	04C-20F	20			33	8	40.6	0.12		
	04C-30F	30			50	10	60.7	0.25		
	04C-10	10			16	6	20.5	0.03		
	04C-13	13			21	6	26.5	0.05		
	04C-15	15			25	6	30.5	0.07		
	04C-20	20			33	8	40.6	0.12		
	04C-25	25			38	8	50.6	0.2		
	04C-30	30			50	8	60.7	0.25		
	04C-35	35			50	10	70.8	0.28		
	04C-40	40			55	10	80.8	0.35		
	04C-50	50			60	10	101.1	0.5		
Suply Chian: Peremeter 508mm/20inch, 80Links. 5080mm/200inch, 800links. We have 04C 16Teeth Tensioner Sproket										
for <b>06B</b> Chian Pitch=9.525mm=3/8"  	06B-10	10	5	20	20	10	30.8	0.06	Standard Processing (without tighten screws)	
	06B-15	15			32	10	45.8	0.16		
	06B-18	18			22	40	10	54.8		0.25
	06B-25	25			48	12	75.8	0.42		
	06B-30	30			24	50	12	91.1		0.5
	06B-40	40			26	60	16	121.4		0.85
	06B-50	50			70	16	151.7	1.2		
Suply Chian: Peremeter 1524mm/60inch, 160Links										
for <b>08B</b> Chian Pitch=12.7mm=1/2"  	08B-10	10	7	24	22	10	40.4	0.11		
	08B-13	13			35	10	52.6	0.2		
	08B-16	16			45	12	64.7	0.35		
	08B-20	20			54	12	81.2	0.55		
	08B-30	30			27	65	16	121.4		1.1
	08B-40	40			30	78	16	161.8		1.85
Suply Chian: Peremeter 1524mm/60inch, 120Links										
<b>Remarks:</b> When choose Standard Processing sprokets, please attention, <b>Bore Diameter maybe no same as list, please subject to the model detail page, it's without tighten screws</b> , it need process Key-Way or screw hole, if need us process contact us(PROCESS MOQ. is 5pcs, need exceed fee), aslo provide bore Dia. extend.										