04C 25T 25 Zähne Kettenräder Pitch 6.35mm 1/4 "Bohrung 8mm Industrie Getriebe Driving für Motor hohe Qualität für Rollenkette 04C

Parameter:
Material: Stahl
Standard: ISO
Modellnummer: 04C-25F
Serie: 04C
Kettenteilung: 6,35 mm, 1/4 Zoll
Zähnezahl: 25 Zähne
Zahnradbreite (mm): 2.8
Gesamtbreite (mm): 16
Rollen Durchmesser (mm)/ Bohrungsdurchmesser: 8mm
Schrauben anziehen:keine
Nettogewicht: 0.2 Kg
Materails: 45 # Stahl
Das Kettenrad Loch Präzision, einfach zu benutzen und wir werden auch kostenlos einen Inbusschlüssel senden.

Steel Sprockets and Chain Specification List

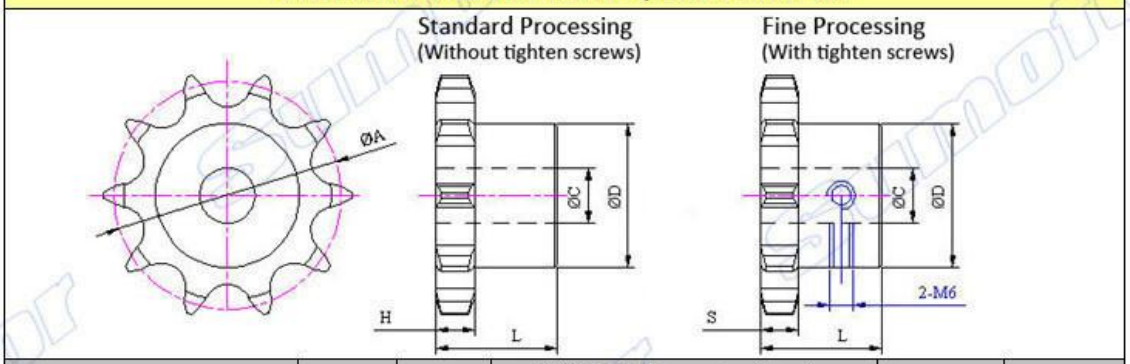

节距 Pitch	型号 Model	齿数 Gear Number	外形尺寸 Dimension（mm） 齿宽 Gear Width H	总厚 Overall Width L	凸台 Plate Dia. D	内孔 Bore Dia. C	分度圆 P Circle Dia. A	Net Weight (Kg)	备注 Remark
for **04C** Chain **Pitch=6.35mm=1/4"** 	04C-10F	10	2.8	16	16	6 \7 \8	20.5	0.03	Fine Processing (with tighten screws)
	04C-15F	15			23	6 \8	30.5	0.05	
	04C-20F	20			33	8	40.6	0.12	
	04C-30F	30			50	10	60.7	0.25	
	04C-10	10			16	6	20.5	0.03	Standard Processing (without tighten screws)
	04C-13	13			21	6	26.5	0.05	
	04C-15	15			25	6	30.5	0.07	
	04C-20	20			33	8	40.6	0.12	
	04C-25	25			38	8	50.6	0.2	
	04C-30	30			50	8	60.7	0.25	
	04C-35	35			50	10	70.8	0.28	
	04C-40	40			55	10	80.8	0.35	
	04C-50	50			60	10	101.1	0.5	
	Suplly Chian: Peremeter 508mm/20inch, 80Links. 5080mm/200inch, 800links.								
	We have 04C 16Teeth Tensioner Sproket								
for **06B** Chian **Pitch=9.525mm=3/8"** 	06B-10	10	5	20	20	10	30.8	0.06	
	06B-15	15			32	10	45.8	0.16	
	06B-18	18		22	40	10	54.8	0.25	
	06B-25	25			48	12	75.8	0.42	
	06B-30	30		24	50	12	91.1	0.5	
	06B-40	40		26	60	16	121.4	0.85	
	06B-50	50			70	16	151.7	1.2	
	Suplly Chian: Peremeter 1524mm/60inch, 160Links								
for **08B** Chian **Pitch=12.7mm=1/2"** 	08B-10	10	7	22	26	10	40.4	0.11	
	08B-13	13		24	35	10	52.6	0.2	
	08B-16	16			45	12	64.7	0.35	
	08B-20	20			54	12	81.2	0.55	
	08B-30	30		27	65	16	121.4	1.1	
	08B-40	40		30	78	16	161.8	1.85	
	Suplly Chian: Peremeter 1524mm/60inch, 120Links								

Remarks: When choose Standard Processing sprokets, please attention, Bore Diameter maybe no same as list, please subject to the model detail page, it's without tighten screws, it need process Key-Way or screw hole, if need us process contact us(PROCESS MOQ. is 5pcs, need exceed fee), aslo provide bore Dia. extend.