

Best Price DC 12V 1CH Wireless Waterproof Remote Control System inter-lock Switch/ Tansmitter and Receiver

Package Include:

- 2 x Receiver(without cover)
- 3 x Transmitter(with battery)

Item specifics

- Item Type:Switches
- Remote Distance:10-100M
- Warranty:1
- Model Number:12v-1
- Features:10A
- Switch Type:Remote Control

Product Description

- 1.Working Voltage: DC12V
- 2.Current:Standby \leq 10mA,Working \leq 128mA
- 3.Working Temperature: -20'C \rightarrow +60'C
- 4.Receiver Frequency: 315MHz/433.92MHZ
- 5.Receiving Sensitivity: -105dB
- 6.Output State: Switching Value
- 7.Max Load:10A Relay, Resistive load less than 8A,Inductive load less than 3A
8. Receiver Board Size:50*32*16mm Case Size:63*38*22mm

Learning Code: Add transmitter by the Learning Button on the receiver

Output State: It is adjusted by the Jumper on the Receiver Board,
(before you change it .you need turn OFF the power. Until you have changed it, then turn ON the power again, or the State will not be changed)

Momentary-----Take away the Jumper or put the Jumper on 1 Pin

Toggle-----Jumper "1& 2 Pin"

Latched-----Jumper "2&3"Pin

Momentary -----Press the Transmitter button and keep, the receiver relay is ON, release button, the receiver relay is OFF,

Toggle -----Press transmitter button for 1 time, the receiver relay is ON, press button again, the receiver relay is OFF,


Latched -----Press transmitter button A, the receiver relay A is ON, Press Button B, the Receiver is OFF

Learning Method

Input power for the Receiver .Press the Learning Button until the Led indicator OFF. Then press transmitter, as your hear the Relay act, it mean learning successfully.

Clearing Code

Keeping press the Learning Button on the receiver until the LED indicator OFF to ON it mean the code have been cleared successfully.

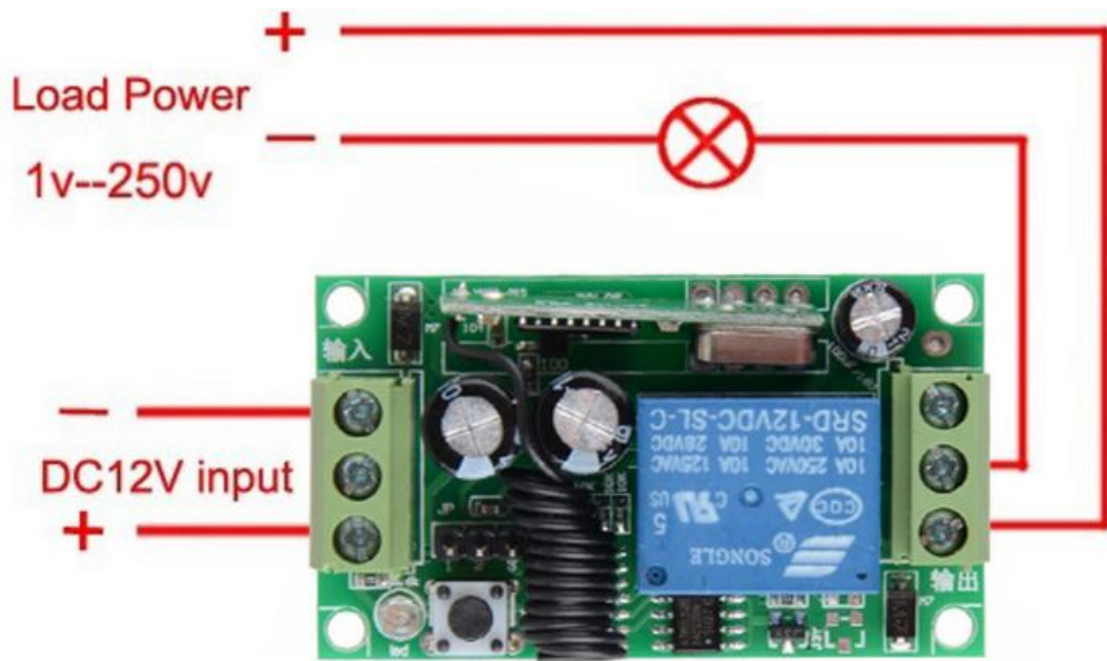

DC12V

