

Packing List

1 X Wifi Smartphone controlled switch module AC

characteristic

App timing function
8group timing at most
once,repeat,delayed time
revise,add,delect all times

ADD Unlimited device
Control all device on 1 app
Group manage available
No limite to device quantity

Share your device to others
Main ID can quick share device
Multiplayer control same device

Features

- 1 Support WIFI network. (**Attention: The switch module must keep connect with wifi service.**)
- 2 **Support three working modes: self-lock, inter-lock and momentary control.**
- 3 Support Max 8 timing tasks for each added device.
- 4 Support status tracking, home appliances status timely feedback to your App.

Product Specification:

- 1 **Input voltage: AC 85-250V**
- 2 Maximum load: 10A
- 3 Working temperature: 0-60 centigrade
- 4 **Control method: WIFI + Manual Button Control**
- 5 Channels: 4 Way
- 6 Switch size: 100*80*28mm
- 7 **Passive output, commonly used as a mechanical switch.**
- 8 **Support system: Android/IOS**

How to connect phone with switch?

- 1 Download and install the software of "eWeLink" from APP store or Google play store.
- 2 Follow "eWeLink" instructions to register an account on it.
- 3 Log in your account of "eWeLink".
- 4 **Press any manual control button (S1,S2,S3,S4) for 5 seconds until you see the LED D8 light flash quickly, then release it. Now add device on mobile phone by eWeLink APP according its introduction.**
- 5 Now you can use your phone to control the switch under 2G/3G/4G signal.
- 6 You can name your own device and control it only by yourself.
- 7 You can also share your device with your family or friends.


How to set working mode?

Supply **AC 85-250V** power to the relay.

- 1: Press **mode button** until you see D9 flash 3 times, release button, now it is **self-lock**.
- 2: Press **mode button** until you see D9 flash 2 times, release button, now it is **inter-lock**.
- 3: Press **mode button** until you see D9 flash 1 time, release button, now it is **momentary**.

What is the difference between working mode?

- 1 **Self-lock:** Press remote button A , receiver CH1 ON. press button A again, then receiver CH1 OFF
- 2 **Inter-lock:** Press remote button A , receiver CH1 ON, and receiver CH2,CH3,CH4 OFF.
- 3 **Momentary:** Keep pressing remote button A, receiver CH1 ON. release button A, then receiver CH1 OFF

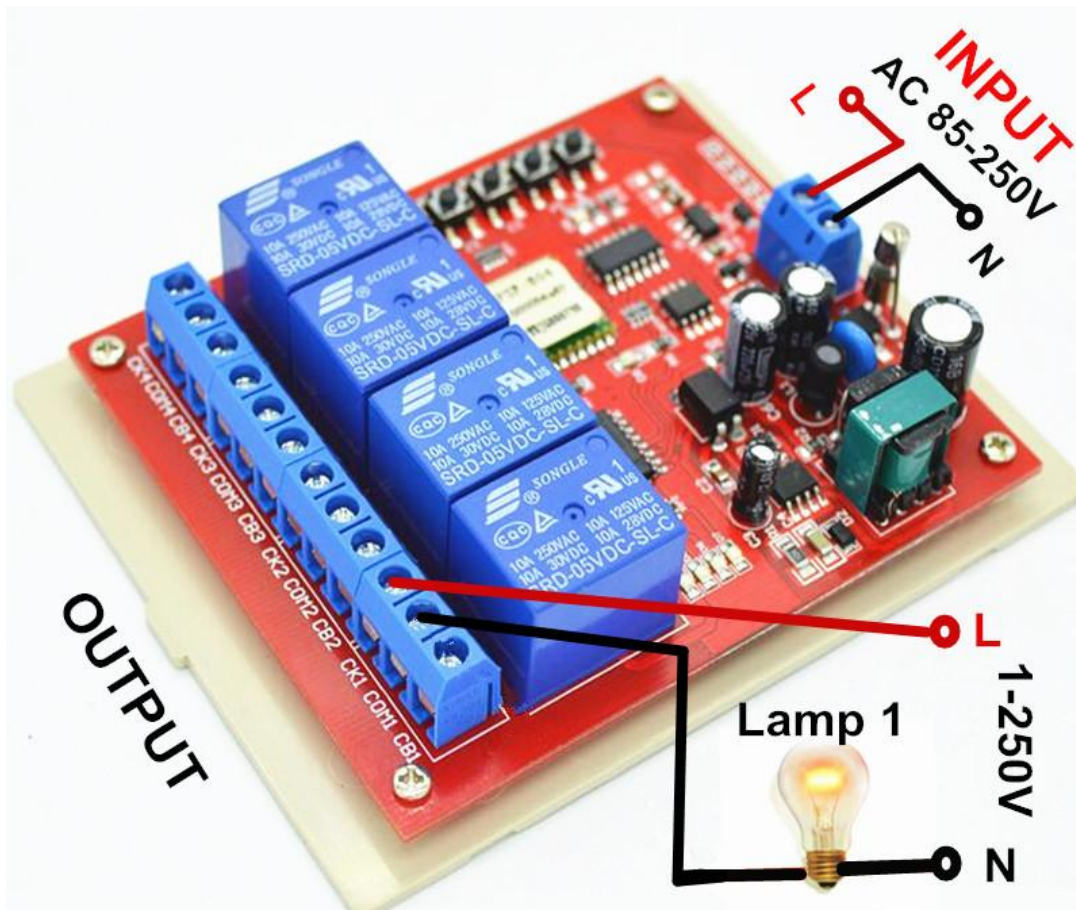


How to connect phone with switch?



- 1: Supply power;
- 2: Keep pressing any manual control button for 5s;
- 3: The D8 light will flash quickly;
- 4: Connect your phone by "EweLink"

How to set working mode?

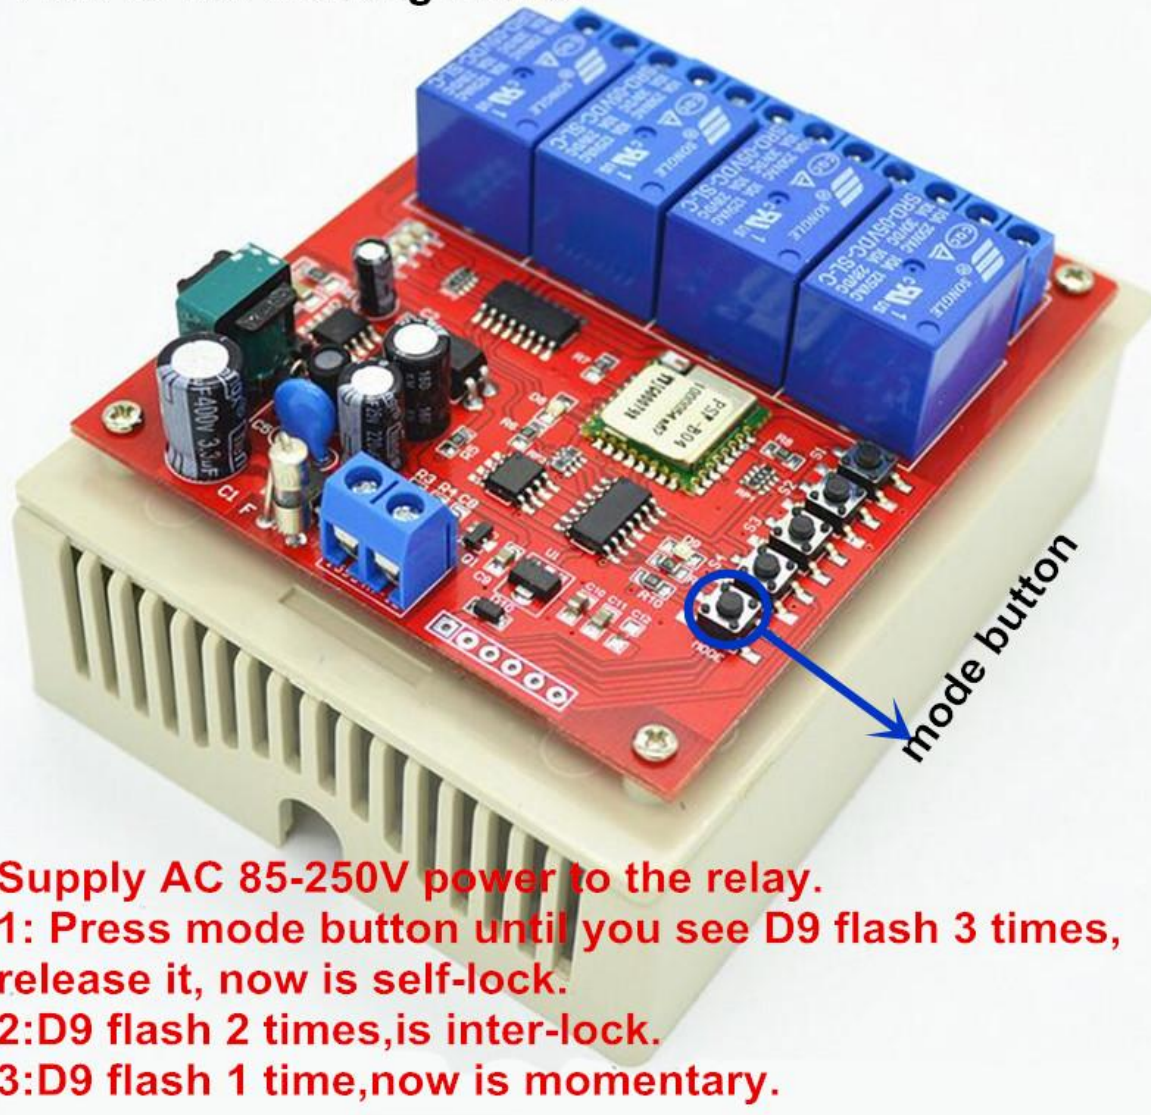

- Supply AC 85-250V power to the relay.
- 1: Press mode button until you see D9 flash 3 times, release it, now is self-lock.
- 2:D9 flash 2 times,is inter-lock.
- 3:D9 flash 1 time,now is momentary.

APP Download



APP timing function
8 group timing at most
once, repeat, delayed time
revise, add, delete all times

