

Wide voltage 12-48V two-way 12-way remote control switch + remote wireless remote control agricultural security industrial control

Packing list:

1 x Receiver

1 x Transmitter (with Battery)

Quick Details

Operating Temperature: -20°C - +70°C

Max. Voltage: 48V

Product Name: 12channel Remote Control Switch

Type: 12-48V Two-Way 12channel receiver

Frequency: 434MHz

Modulation mode: FSK+LoRa

Max.load: ≤10A

Weight: 0.23KG

Specification: 122\*87\*17.5mm

Features:1)12channel

2)long distance(4000meters)

3)433.92MHz

Technical Parameters:

(1)working voltage:DC12-48V

(2)Frequency:433.92mhz

(3)Modulation mode:ASK+LoRA

(4)Weight:0.23KG

(5)Size:122\*87\*17.5mm

Application scope:

Long distance remote control for Farmland, pasture.....

Usage method

1.Learning method:Hold the learning key,the indicator light turn on,release the learn key,hold any button on the remote.The indicator light flash twice slow,learned succeed.

2.Remove method

Continue to hold the learning key,the indicator light from normally on to flash twice slow.Remove succeed.

3.Working mode

Jog----dip switch to 1,2 position

Self-lock----dip switch to 2 position


Inter-lock----dip switch to 1 position

The receiving module is a bidirectional transceiver module, which is matched with a two-way remote controller. When the receiving module receives a two-way remote controller signal, it will send a signal to the remote controller, the remote controller after receiving the signal, the buzzer will issue a "drop" sound. This shows that the two-way remote control receive normal communication.




## Wiring diagram

# Control DC 12-48V load

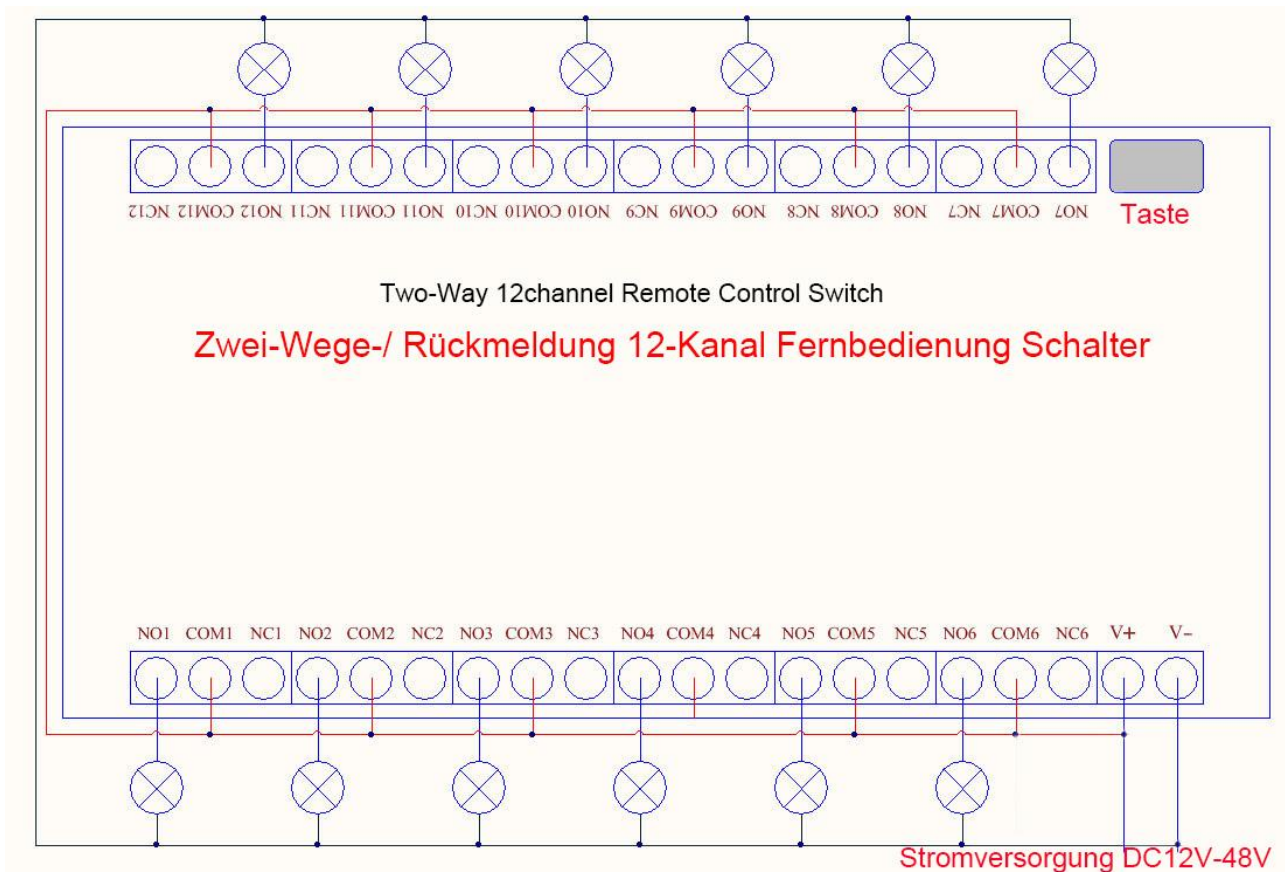

# Control other voltage load

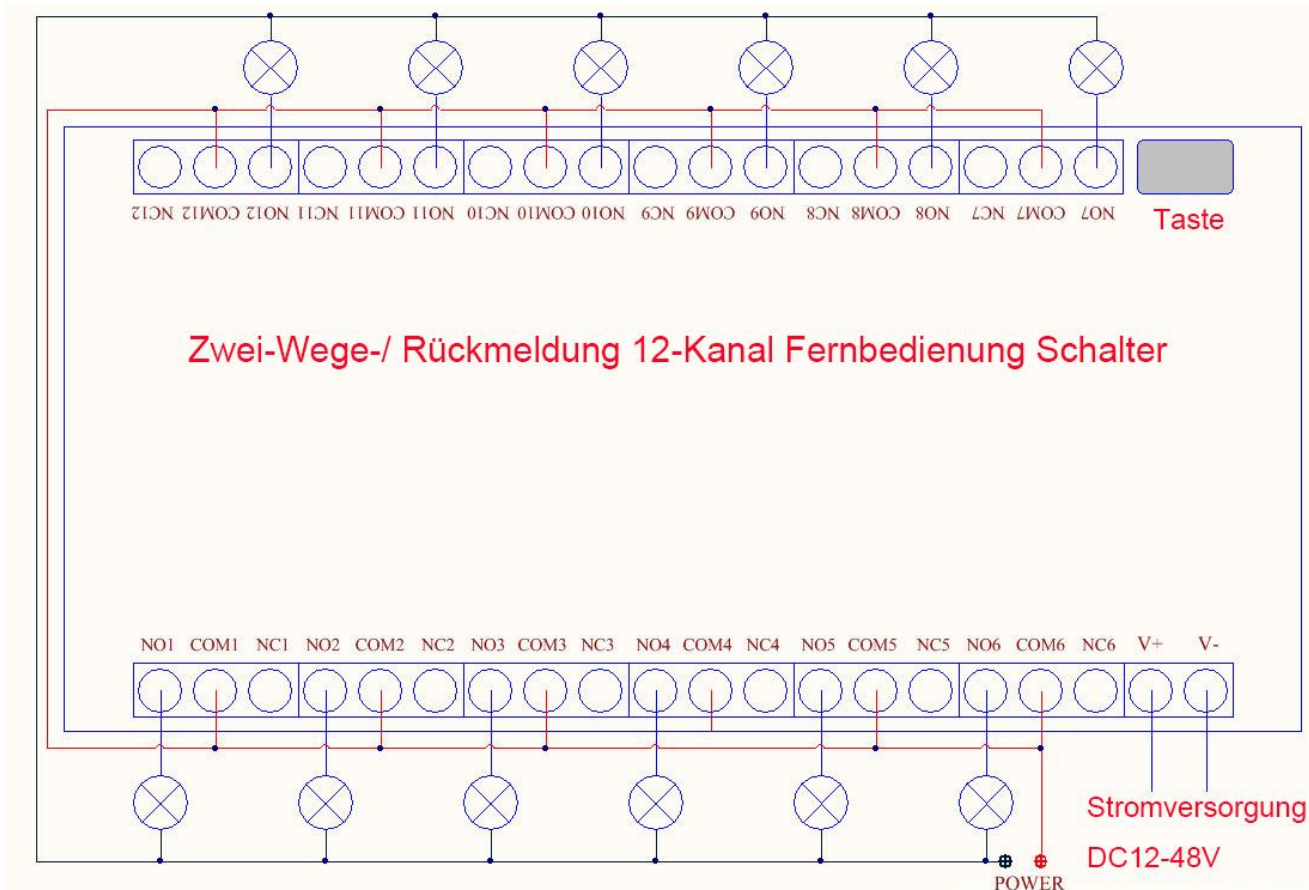

SHENZHEN Lejing INDUSTRY DEVELOPMENT CO.LTD

<http://www.einausschalten.com/> E-Mail: [sale@einausschalten.com](mailto:sale@einausschalten.com) Whatsapp: +86 183 2644 0199