WIFI Switch 4CH 60V 220V 270V AC wi-fi Interruptor Control by APP On Off Wireless Light switches for Home Smart

Packing List:

1 X 4 Way Switch 1 X RF Remote Transmitter (Build-in a battery)

Item specifics Type:Switches Switch Type:APP Control Features:WIFI SWITCH Certification:CCC Input voltage:AC 60-270V Maximum Ioad::10A Working temperature:0-60 centigrade Output voltage:AC 60-270V Controlled methods:WIFI +Manual Button Control Channel:4 Way / 4 Channel Phone operating system:IOS, Android Switch Relay Size:100*80*28mm Active output:Yes

Features

1 Support WIFI network. (Attention: The switch module must keep connect with wifi service.)

2 Support three working modes: self-lock, inter-lock and momentary control.

3 Support Max 8 timing tasks for each added device.

4 Support status tracking, home appliances status timely feedback to your App.

Product Specification:

- 1 Input voltage: AC 60-270V
- 2 Output voltage: AC 60-270V
- 3 Maximum load: 10A
- 4 Working temperature: 0-60 centigrade
- 5 IN+ connect with Live wire; IN- connect with Null wire;
- 6 Control method: WIFI + Manual Button Control
- 7 Channels: 4 Way
- 8 Switch size: 100*80*28mm
- 9 Active output, when you supply 220V power, the output will be 220V also.
- 10 Support system: Android/IOS

How to connect phone with switch?

1 Download and install the software of "eWeLink" from APP store or Google play store.

2 Follow "eWeLink" instructions to register an account on it.

3 Log in your account of "eWeLink".

4 Press any manual control button (S1,S2,S3,S4) for 5 seconds until you see the LED light flash quickly, then release

it. Now add device on mobile phone by eWeLink APP according its introduction.

5 Now you can use your phone to control the switch under 2G/3G/4G signal.

6 You can name your own device and control it only by yourself. 7 You can also share your device with your family or friends.

How to set working mode?

Supply AC 60-270V power to the relay.

1: Press mode button until you see LED flash 3 times, release button, now it is self-lock.

2: Press mode button until you see LED flash 2 times, release button, now it is inter-lock.

3: Press mode button until you see LED flash 1 time, release button, now it is momentary.

What is the difference between working mode?

1 Self-lock: Press remote button A, receiver CH1 ON. press button A again, then receiver CH1 OFF

2 Inter-lock: Press remote button A, receiver CH1 ON, and receiver CH2, CH3, CH4 OFF.

3 Momentary: Keep pressing remote button A, receiver CH1 ON. release button A, then receiver CH1 OFF



Input AC 60-270V Output AC 60-270V


How to connect phone with Switch




- 1 Keep the switch and phone in the same WIFI service;
- 2 Supply power;
- 3 Keep pressing any button between S1-S4 for 5 seconds;
- 4 The LED light will flash quickly;
- 5 Connect your phone by APP "eWelink"

How to set working mode?

Supply AC 60-270V power to the relay.
1: Press mode button until you see LED flash 3 times, release button, now it is self-lock.
2: Press mode button until you see LED flash 2 times, release button, now it is inter-lock.
3: Press mode button until you see LED flash 1 time, release button, now it is momentary.

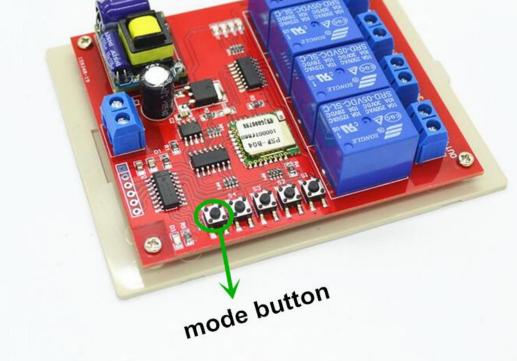

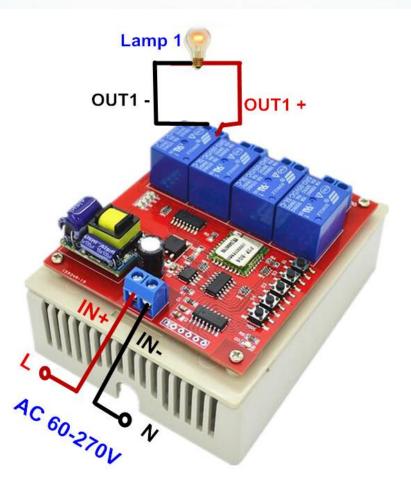



Available to control in Wifi/2G/3G/4G

Self-defined power on/off button

Set once, Saving in app, revise anytime



 SHENZHEN Lejing INDUSTRY DEVELOPIVIENT COLLD

 http://www.einausschlaten.com/
 E-Mail: sale@einausschalten.com
 Whatsapp: +86 183 2644 0199