

Produktbeschreibung

Vibrationsmotor 230V Vibrationsmotor für Silo / Sieb


Parametertabelle der Serie PUTIAN-07

Single-phase (50Hz-220V/110V) (60Hz-110V/120V/220V/240V) (2 poles)

Model number	Voltage (V)	Current (A)	Power (KW)	Speed(rpm) 50Hz/60Hz	Force (KN)	Werght (KG)	Frame No.
30/2S-7	220V/110V	0.12/0.25	0.03	3000 3600	0.3	1.6	7
40/2S-7	220V/110V	0.108/0.312	0.04	3000 3600	0.4	1.7	7
50/2S-14	220V/110V	0.175/0.465	0.05	3000 3600	0.5	2.4	14
60/2S-14	220V/110V	0.184/0.495	0.06	3000 3600	0.6	2.5	14
70/2S-14	220V/110V	0.195/0.545	0.07	3000 3600	0.7	2.6	14
80/2S-14	220V/110V	0.218/0.615	0.08	3000 3600	0.8	2.7	14
90/2S-14	220V/110V	0.263/0.628	0.09	3000 3600	0.9	2.8	14
100/2S-14	220V/110V	0.315/0.921	0.10	3000 3600	1.0	2.9	14

Three-phase (50Hz-380V/220V) (60Hz-220V/240V/380V/460V) (2 poles)

Model number	Voltage (V)	Current (A)	Power (KW)	Speed(rpm) 50Hz/60Hz	Force (KN)	Werght (KG)	Frame No.
30/2-7	380V/220V	0.0103/0.017	0.03	3000 3600	0.3	1.6	7
40/2-7	380V/220V	0.0104/0.018	0.04	3000 3600	0.4	0.7	7
50/2-14	380V/220V	0.216/0.374	0.05	3000 3600	0.5	2.3	14
60/2-14	380V/220V	0.217/0.375	0.06	3000 3600	0.6	2.5	14
70/2-14	380V/220V	0.22/0.381	0.07	3000 3600	0.7	2.6	14
80/2-14	380V/220V	0.225/0.389	0.08	3000 3600	0.8	2.7	14
90/2-14	380V/220V	0.235/0.407	0.09	3000 3600	0.9	2.8	14
100/2-14	380V/220V	0.245/0.424	0.10	3000 3600	0.10	2.9	14

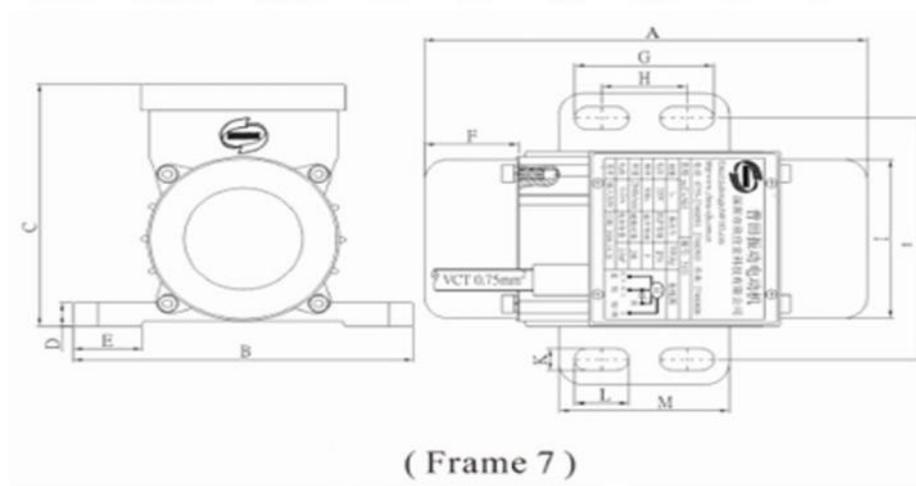

Products Show

How to choose the right motor?

1. (Old Users) Check parameters or take pictures of old motor nameplates



2. (New user) Calculate the total weight of material and equipment on the upper part of spring, industry, use environment, etc.



SERVE ALL WALKS OF LIFE

Screening, grading, cutting, anti-blocking, and other vibration sources

