

Product Description

Brushless DC vibration motor, can be used for mixing truck blanking, outdoor battery can be used, safe and convenient

Туре	Voltage(V)	Current(A)	Power(w)	Speed(rpm)	Force(KN)	Weight	
260DCB12/20	12	10	100	3600	2.6	6.8	
300DCB24/20	24	8	160	3600	3	6.8	
300DCB36/20	36	5.6	160	3600	3	6.8	

Products Show






机座10/20 (Frame 10/20)

安装外形尺寸表 Installation of overall dimension

单位Unit: mm

机座号	A	A2	в	B2	С	D	E	F	G	н		L	м	N	引线连接 lead-wire connection
Frame No.		1000	- 10	and the second		(HTTC)									lead-wire connection
10	62-74	33	106	83-102	211	143	136	12	¢10	55	94	104	45	90	M16×1.5
20	60-74	33	106	86-102	217	130	158	14	φ9	64	120	123	48	112	M16×1.5

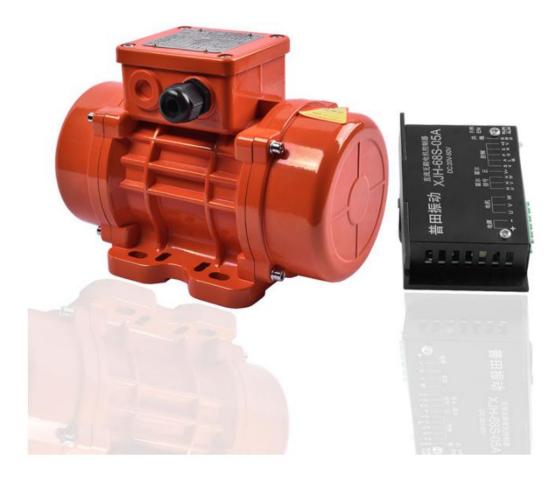

How to choose the right motor?

1. (Old Users)Check parameters or take pictures of old motor nameplates



2. (New user) Calculate the total weight of material and equipment on the upper part of spring, industry, use environment, etc.



SERVE ALL WALKS OF LIFE

Screening, grading, cutting, anti-blocking, and other vibration sources

