


Product Description

The DC vibration motor can be connected with lithium battery outdoors, and the vibration force can reach 1.3kn and 1.5kn. The strong power can provide the vibration source for the equipment

Type	Voltage(V)	Current(A)	Power(w)	Speed(rpm)	Force(KN)	Weight
130DCB12/10	12	6	70	4300	1.3	5
150DCB24/10	24	5	100	4600	1.5	5
150DCB36/10	36	3.3	100	4600	1.5	5

Products Show

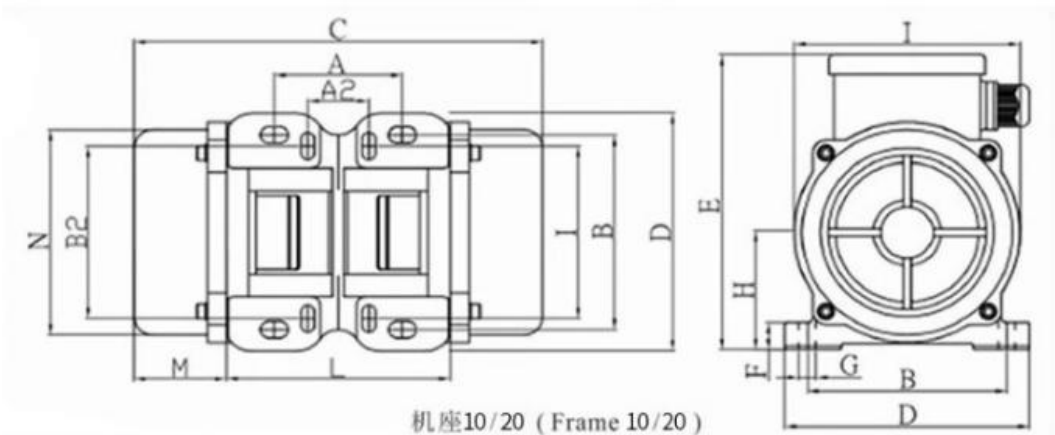

安装外形尺寸表

Installation of overall dimension

单位Unit: mm

机座号 Frame No.	A	A2	B	B2	C	D	E	F	G	H	I	L	M	N	引线连接 lead-wire connection
10	62-74	33	106	83-102	211	143	136	12	Φ10	55	94	104	45	90	M16×1.5
20	60-74	33	106	86-102	217	130	158	14	Φ9	64	120	123	48	112	M16×1.5

# DC OUTDOOR VIBRATION MOTOR

12V24V36V ADJUSTABLE SPEED, PROVIDING VIBRATION SOURCES FOR VARIOUS MACHINES



1.DIGITAL DISPLAY VERSION




1.STANDARD REGULATOR  
2.S 485 COMMUNICATION

# How to choose the right motor?

1. (Old Users) Check parameters or take pictures of old motor nameplates



2. (New user) Calculate the total weight of material and equipment on the upper part of spring, industry, use environment, etc.

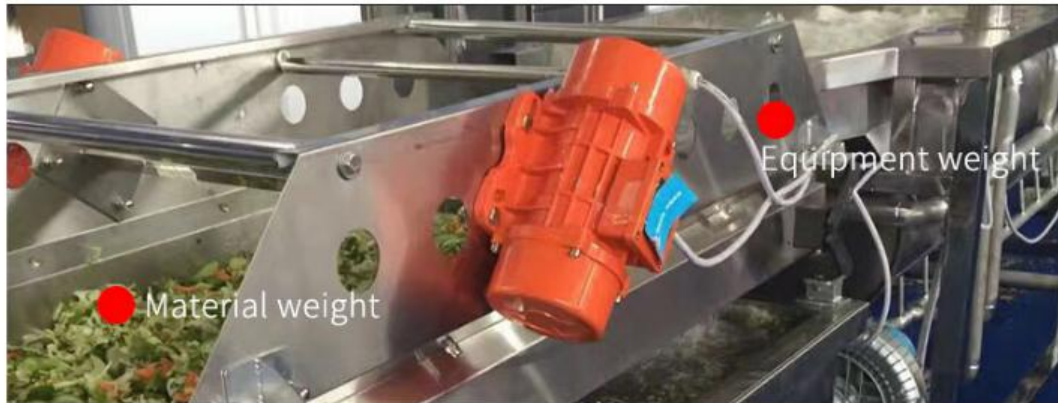

# SERVE ALL WALKS OF LIFE

Screening, grading, cutting, anti-blocking, and other vibration sources

