# **Product Description**

# **Specifications:**

**Operating Voltage:** DC12V **Operating Current:** ≤ 6Ma

Operating Frequency: 315,433 MHz Operating Temperature: -40  $^{\circ}$ C  $^{\circ}$  +80  $^{\circ}$ C

**Receiver Sensitivity:** ≥-105dBm **Output Voltage:** AC / DC (optional)

Output Current:  $\leq 10A$ 

Code :Learning code .(jog/Non-Latched .inter-lock/Latched .self-lock /Self Latched )

Size: 35MM\*32MM\*17MM

## Output working way:

**Jog/Non-Latched:** press one button is working /ON. loosen your finger on the same button is stop/OFF .one channel switch need one buttons remote control

**Self -lock/Self-Latched:** press one button for one time is working/ON .press the same button again is stop/OFF .(one channel switch need one buttons remote control

**Inter-lock** /Latched: press one button is working/ON ,press another button is stop/OFF. (one channel switchneed 2 buttons remote control)

### **Learning Method:**

Press the learning button3 seconds, the indicator light off .then you press any buttons of the remote control to transmite signal . it means studying successfully when the indicator flash 3 times until the indicator light on.


#### Remove code:

press the learning button about 8 seconds , the indicator turn on to off to on , it means the information that you keep have been removed successfully .

## **Package Include:**


- 1 x Receiver(with cover)
- 1 x Transmitter(with battery)

# DC12V Wiring diagram

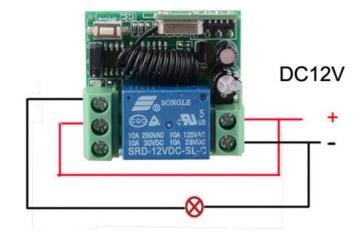


http://www.einaus

# Electric Control Lock

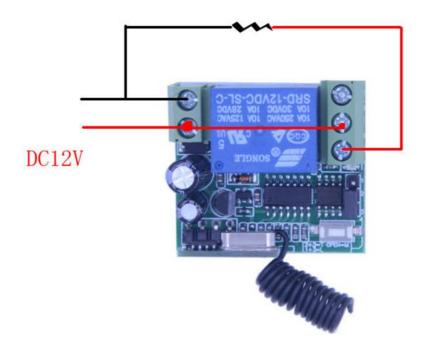

# Entrance guard control wiring diagram

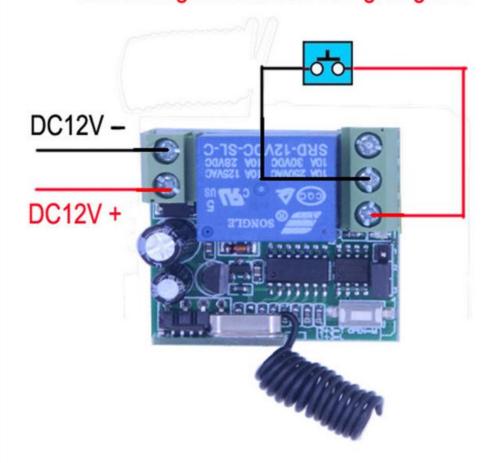

Jumper: 1&2 working way Latched
Jumper: 2&3 working way Toggle
Jumper non-occupation working way: Momentary
To change Toggle. Latched.

