

## Product Description

Small vibration motor, to provide liquidity for various equipment, such as blanking, screening, grading, etc

### X04/19 series parameter table

#### Single-phase (50Hz-220V/110V) (60Hz-110V/120V/220V/240V) (2 poles)


Single-phase (50Hz-220V/110V) (60Hz-110V/120V/220V/240V) (2 poles)

Model number	Voltage (V)	Current (A)	Power (KW)	Speed(rpm) 50Hz/60Hz		Force (KN)	Werght (KG)	Frame No.
30/2S-4	220V/110V	0.1/0.25	0.03	3000	3600	0.3	3	4
40/2S-4	220V/110V	0.12/0.28	0.04	3000	3600	0.4	3	4
50/2S-19	220V/110V	0.175/0.465	0.05	3000	3600	0.5	3	19
60/2S-19	220V/110V	0.184/0.495	0.06	3000	3600	0.6	3	19
70/2S-19	220V/110V	0.195/0.545	0.07	3000	3600	0.7	3	19
80/2S-19	220V/110V	0.218/0.628	0.08	3000	3600	0.8	3	19
90/2S-19	220V/110V	0.263/0.628	0.09	3000	3600	0.9	3	19
100/2S-19	220V/110V	0.315/0.821	0.10	3000	3600	1.0	3	19

Three-phase (50Hz-380V/220V) (60Hz-220V/240V/380V/460V) (2 poles)

Model number	Voltage (V)	Current (A)	Power (KW)	Speed(rpm) 50Hz/60Hz		Force (KN)	Werght (KG)	Frame No.
30/2-4	380V/220V	0.11/0.13	0.03	3000	3600	0.3	3	4
40/2-4	380V/220V	0.12/0.15	0.04	3000	3600	0.4	3	4
50/2-19	380V/220V	0.197/0.230	0.05	3000	3600	0.5	3	19
60/2-19	380V/220V	0.198/0.245	0.06	3000	3600	0.6	3	19
70/2-19	380V/220V	0.232/0.264	0.07	3000	3600	0.7	3	19
80/2-19	380V/220V	0.250/0.279	0.08	3000	3600	0.8	3	19
90/2-19	380V/220V	0.261/0.292	0.09	3000	3600	0.9	3	19
100/2-19	380V/220V	0.275/0.310	0.10	3000	3600	1.0	3	19

## Products Show

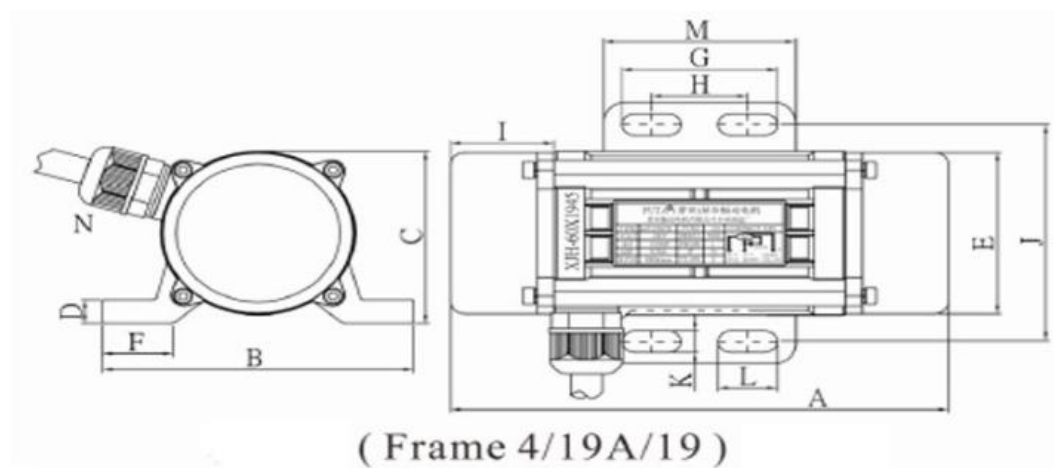

Installation of overall dimension

Unit: mm

Frame No.	A	B	C	D	E	F	G	H	I	J	K	L	M	N
4	146	110	68.5	9	60,4	27.5	45	27.5	30,5	91.5	9	17.5	55	M-16
19A	151	110	72.5	10	68	25	55	34	24	91.5	9	21	68	M-16
19	176	110	72.5	10	68	25	55	34	36.5	91.5	9	21	68	M-16

## Quality Assurance of Seiko Manufacturing



**Stator**

F-Pole Insulation Grade  
High temperature resistance



**Eccentric block**

Adjusting exciting force  
Satisfy all kinds of work needs



**Power Wire Sheath**

Anti-oxidation and anti-distortion



**Bearing**

Precision, Low Noise and Wear Resistance



Thickened Base/Strong Vibration Resistance



Small size/strong power



Power supply line below 100W

