

## RF DC3V to 12v Remote Control Switch Motor Coil Forward and Reverse Learning Code 433mhz Transmitter +Receiver

### Item specifics

Package:YesFrequency:433 MHz  
Channel:1Model  
Use:Universal  
Power supply module:DC3v to 12v  
Module consumption:standby 0.01mA working 6mA  
Remote control frequency:433mhz  
Module size:0.79inch\*0.40inch\*0.16inch  
Control distance:20meters open environment, can through walls  
remote control size :2.41inch\*1.12inch\*0.48inch  
remote control button:2 button  
The customer diy:Suitable for the customer DIY  
Module function:Forward and reverse  
remote material:Black plastic

### Product Description


- 1.360 degree,NO dead Angle
- 2.RF Remote Control Switch,can through walls
- 3.Ultra low power,Suitable for battery
- 4.Super small size,Factory direct sale
- 5.Independent coding, many sets will be not interference of each other
- 6.If need more set of general,please descr

### Product scope

The EMIFIL circular coil, coil, motor, electromagnet, The positive and negative switch with each other

### Product parameters

working voltage:DC3v to 12v  
power current: standby 0.01mA, working 6mA  
Remote control frequency:433mhz  
Input voltage=output voltage  
Load: Less than 400mA(Less than 4 watts of equipment)  
Magnetic induction coil current large equipment, Module will automatically over-current protection, Can only work for 1s  
Module size:0.79inch\*0.40inch\*0.16inch  
REMOTE SIZE:2.41inch\*1.12inch\*0.48inch  
Control Distance: open environment 20M,can through the walls

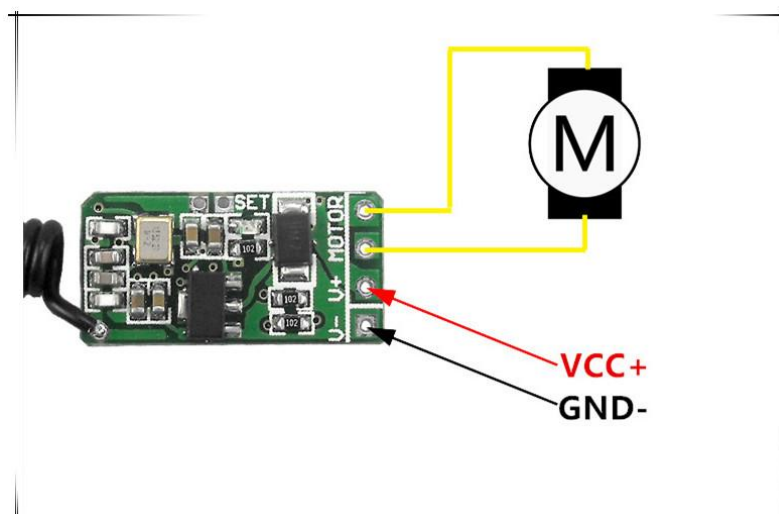

#### Usage mode

Reference to connection, connect the power supply for correctly, use the remote control motors

Press "A" button, the motor forward, Loosen "A" button, Motor stopped.

Press "B" button, the motor inversion, Loosen "B" button, Motor stopped

Please don't hold control "A" and "B" button at the same time

Module programs use sleep mode, Its low power consumption, Suitable for batteries

For the opportunity to automatically into low power consumption state of dormancy, So when they use 1 s delay.

#### Performance reference

1. output voltage=The input power supply voltage

2. when you use, Module will be a bit hot, That is normal, Don't worry

3. Control module with over-current protection, Starting current is less than 400mA, normal use

4. starting current is larger with motor, Instant power will be closed 1 times

5. More than a limited amount of current, Will be power-off protection.

6. The magnetic induction coil current is the largest state in general, So there will be blackout. Power is equal to the job 1s.

7. Dormancy program, Their basic don't Consumption of electricityelectricity

8. Is the positive/negative switching outputs, Can only use the remote control output and positive negative conversion.