

85v~250V 110V 220V 230V 4CH RF Wireless Remote Control Relay Switch Receiver Security System Garage Doors

Item specifics

Switch Type:Remote Control
Certification:CCC
Warranty:1 year
Features:high quality
Item Type:Switches

Product Description

About Receiver:
Model No.: AK-RK04SE-220
Channel: 4 CH
Frequency:315MHZ or 433.92MHZ
Operating Voltage:AC85V-260V
Coding Type: learning code
Maximum Working Current: 10A
Output Mode: Without voltage output(also called Contact output)
Step-down approach: resistance-capacitance(RC)
size: 107*48*21mm

About Working way/ output Way:

It is adjusted by the Jumper on the Receiver Board
Jumper non : Momentary/ Jog--Press and hold -> On; Release -> Off.
Jumper on 1&2 :Toggle/ Self-lock--Press -> On; Press again -> Off.
Jumper on 2&3 : Latched/ Interlock--Press -> On; Press other button -> Off.

About Learning and clearing Method:

Learning:

Input 220V for the receiver .LED indicator ON .Press the learning button, The indicator OFF, then please press any buttons of the remote control , The indicator will flash 3 times,It means successfully studied.


Clearing:

Hold press learning button about 8 seconds,,indicator from OFF to ON,then press remote ,receiver did not work ,it means clearing code successful.

Package Include:

1* Receiver (with cover)
4* Remote Control (with battery)

Input 85--250V

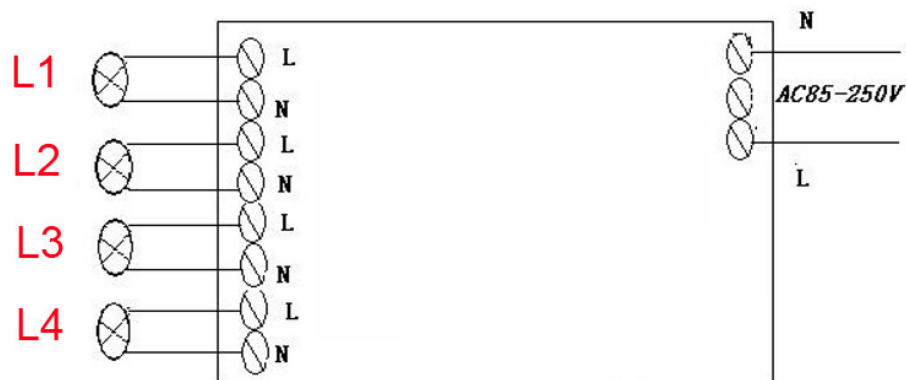

Output 85--250V